

Scan QR Code For Full Folder View



OUR PRODUCT RANGE



Recommended Adhesive For ACRYLIC SHEETS
Special Wood Adhesive for PVC, Acrylic & Charcoal Sheet

BEYOND
...a class apart

Magnum
MAGNUMS

6H
Antiscratch
Acrylic



MAGNUMS

6H
Antiscratch
Acrylic

Superiority, We Maintain.

M A G N O U S



DECORE
YOUR
Dreams

*we have always had the desire to dream,
But, more importantly, We have the ability,
Which is why we have designed a collection
that will extend exclusive comfort,
It's valuable craftsmanship, It's rich materials
and its attention of detail to the world of laminates.
A collection of dreams that live in reality.*

FEATURES



ANTI SCRATCH

Treated with a special lacquer coating on the surface, our 6th anti scratch acrylic laminates can bear daily wear & tear.



ANTI YELLOW

Anti-Yellow UV Resistance.



ANTI-VIRUS PROPERTIES

Anti-bacterial and Anti-fungal.



TERMITE & BORER FREE

Our laminate are specially treated to ensure they remain termite and borer



WIDE RANGE

Lots of Range and Huge Collection.



WATER PROOF

Low porosity low water absorption.



LIGHT WEIGHT

For ease of use and Effortless installation, our Range of laminates have been developed in A way to keep them extremely light weight.



HIGHLY DURABILITY & STRENGTH

Our Anti Scratch Acrylic Laminates are Extremely sturdy and Durable. They can stand heavy loads



100% PURE ACRYLIC

100% Pure Acrylic Sheet

APPLICATION



Kitchen



Furniture



Bathroom



Commercial



Healthcare



Hospitality & Restaurants

Magnus
MAGNUS

6H
Antiscratch
Acrylic

Magnum



MA 901

SNOW WHITE



MA 926

PURE WHITE

Sheet Size : 1220mm x 2440mm (4ft x 8 ft)

-  WATER RESISTANT
-  TERMITE RESISTANT
-  NO FORMALDEHYDE
-  LONG LASTING
-  AESTHETIC LOOK

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

6H

Antiscratch
Acrylic



Sheet Size : 1220mm x 2440mm (4ft x 8 ft)



MA 902

ASH



MA 927

CLOUD



MA 903

SMOKE

-  WATER RESISTANT
-  TERMITE RESISTANT
-  NO FORMALDEHYDE
-  LONG LASTING
-  AESTHETIC LOOK



6H
Antiscratch
Acrylic



Sheet Size : 1220mm x 2440mm (4ft x 8 ft)

Magnum

BEYOND
...a class apart



MA 905

BADGE



MA 906

MOCHA



MA 907

CLAY

6 INCH X 2.5 INCH

6 INCH X 2.5 INCH

6 INCH X 2.5 INCH

- WATER RESISTANT
- TERMITE RESISTANT
- NO FORMALDEHYDE
- LONG LASTING
- AESTHETIC LOOK

05 - 06

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

6H
Antiscratch
Acrylic




Magnans

BEYOND
...a class apart



MA 908

SKY

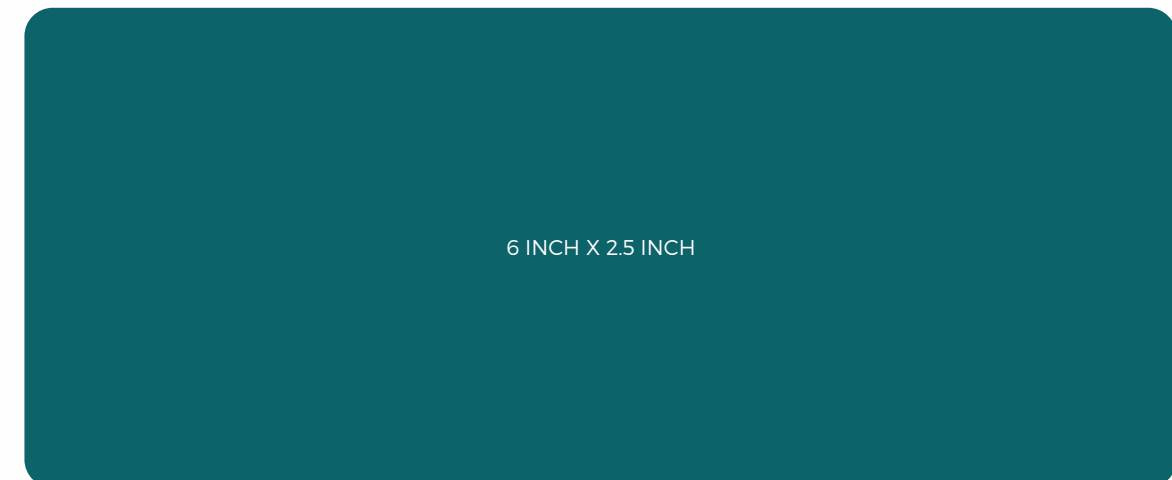

MA 909

PACIFIC



MA 910

LAGOON

- WATER RESISTANT
- TERMITE RESISTANT
- NO FORMALDEHYDE
- LONG LASTING
- AESTHETIC LOOK

Sheet Size: 1220mm x 2440mm (4ft x 8 ft)

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

07 - 08



6H
Antiscratch
Acrylic

BEYOND
...a class apart

Magnum



Sheet Size: 1220mm x 2440mm (4ft x 8 ft)



6 INCH X 2.5 INCH

MA 914

COTTON



6 INCH X 2.5 INCH

MA 915

PISTACHIO



6 INCH X 2.5 INCH

MA 916

OLIVE

- ☑
WATER RESISTANT
- ☑
TERMITE RESISTANT
- ☑
NO FORMALDEHYDE
- ☑
LONG LASTING
- ☑
AESTHETIC LOOK

09 - 10

There can be colour variation in material from different batches, It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

6H
Antiscratch
Acrylic



Sheet Size : 1220mm x 2440mm (4ft x 8 ft)

Magnum



6 INCH X 2.5 INCH

MA 928

BEIGE



6 INCH X 2.5 INCH

MA 929

PORCELATN



6 INCH X 2.5 INCH

MA 930

LILAC

- ☑
WATER RESISTANT
- ☑
TERMITE RESISTANT
- ☑
NO FORMALDEHYDE
- ☑
LONG LASTING
- ☑
AESTHETIC LOOK

6H
Antiscratch
Acrylic



Sheet Size: 1220mm x 2440mm (4ft x 8 ft)

Magnum



MA 911

MILKY



MA 904

FOSSIL



MA 922

JET BLACK

- ☑
WATER RESISTANT
- ☑
TERMITE RESISTANT
- ☑
NO FORMALDEHYDE
- ☑
LONG LASTING
- ☑
AESTHETIC LOOK

6H
Antiscratch
Acrylic



Sheet Size: 1220mm x 2440mm (4ft x 8 ft)

Magnum

BEYOND
...a class apart



MA 920

SALT



MA 931

KHAKI



MA 932

NAVY

- WATER RESISTANT
- TERMITE RESISTANT
- NO FORMALDEHYDE
- LONG LASTING
- AESTHETIC LOOK

6H
Antiscratch
Acrylic



Sheet Size: 1220mm x 2440mm (4ft x 8 ft)

Magnum



MA 917

PEARL



MA 918

LATTICE



MA 919

COPPER

- ☑
WATER RESISTANT
- ☑
TERMITE RESISTANT
- ☑
NO FORMALDEHYDE
- ☑
LONG LASTING
- ☑
AESTHETIC LOOK



6H

Antiscratch
Acrylic



Sheet Size : 1220mm x 2440mm (4ft x 8 ft)

Magnum



MA 912

HAZEL NUT



MA 913

COFFEE



MA 933

COPPER GOLD

- WATER RESISTANT
- TERMITE RESISTANT
- NO FORMALDEHYDE
- LONG LASTING
- AESTHETIC LOOK

6H
Antiscratch
Acrylic



Sheet Size : 1220mm x 2440mm (4ft x 8 ft)

Magnum



MA 921

SILVER METAL



MA 934

GRAY METAL



MA 935

STONE

- ☑
WATER RESISTANT
- ☑
TERMITE RESISTANT
- ☑
NO FORMALDEHYDE
- ☑
LONG LASTING
- ☑
AESTHETIC LOOK



6H
Antiscratch
Acrylic



Sheet Size : 1220mm x 2440mm (4ft x 8 ft)

Magnum




MA 923

GOLD



MA 924

BRONZE

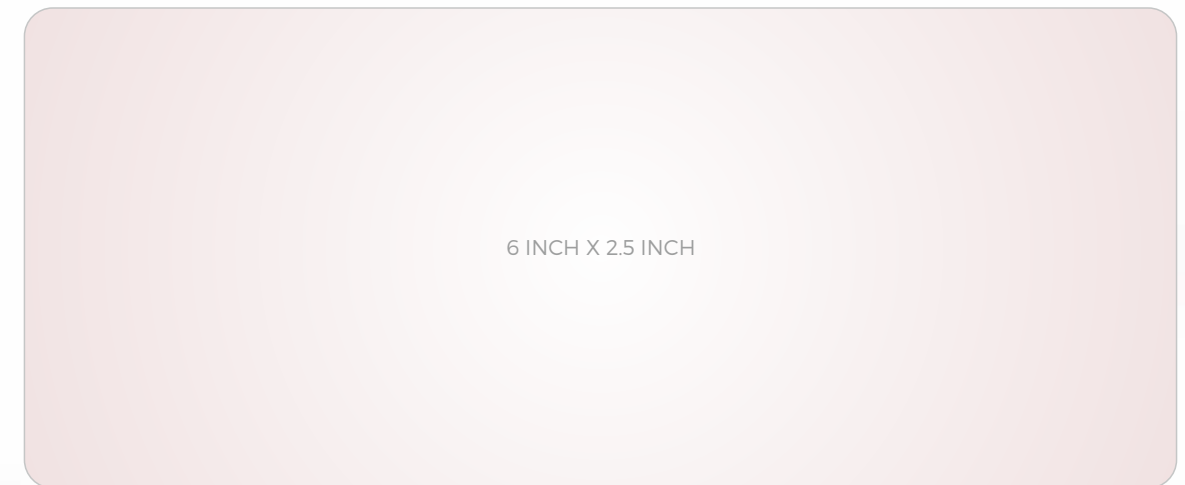

MA 925

ROSE GOLD

- |
WATER RESISTANT
- |
TERMITE RESISTANT
- |
NO FORMALDEHYDE
- |
LONG LASTING
- |
AESTHETIC LOOK




reasons for air bubble formations on acrylic sheets

To avoid de lamination / air bubbles in between ply and laminate the above steps should be taken care of. Bonding of acrylic sheets shouldn't be completed under high humidity



Acrylic are bonded in extremely humid conditions



Debonding in certain areas because of uneven substrate surface



Use of water base synthetic resin adhesive any other the PEVA (Polyethylene Vinyl Acetate Co-polymer)



Insufficient or lack of pressing during the bonding



When substrate loses moisture after installation



Use of extremely large acrylic/PVC laminate sheets (more than 8 ft x 2 ft long)

disclaimer


Do not use plywood with high moisture content, Do not use ply with uneven surface, Avoid using inferior quality adhesive, Apply sufficient pressure We do not recommend pasting of sheets on the printed/branding area of the plywood

do's & don't's

1. Store the laminates below 30°C temperature. To avoid the inside cracks & stretch line, do not store acrylic sheet in roll form.
2. Clean the surface of laminate with water and clean, non-abrasive cloth. We recommend cleaning with COLIN glass cleaner and soft Micro fibre cloth.
3. Glossy surfaces recommended to use in vertical applications.
4. Do not use alcohol based cleaners, solvent, petrol or oil as these may damage the surface of the laminate. Do not use cloth other than micro fibre.
5. Do not use thinner on the surface of BEYOND laminates.
6. Do not place hot cookware directly on the laminate as the exposure to temperatures above 30°C may cause damage to the laminate surface.
7. Outdoor application of the laminate with exposure to direct sunlight and weather conditions are strict not recommended. UV rays may de-shape the laminate.

Parameters	BEYOND Acrylic Laminate	High Gloss Laminate Mica	PU Coating / Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Antisratch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	Yes
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

PANEL STRUCTURE

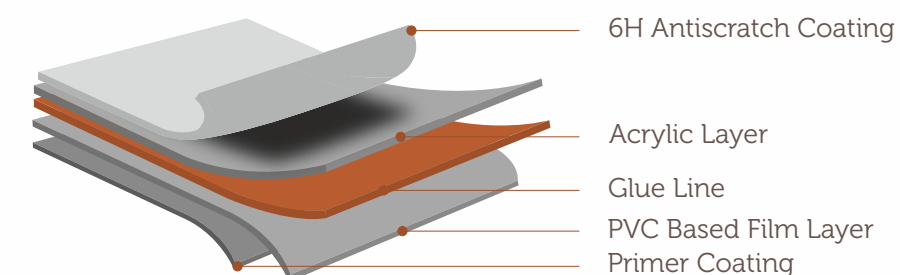

Recommended Adhesive For ACRYLIC SHEETS
Special Wood Adhesive for PVC, Acrylic & Charcoal Sheet



LIMITED WARRANTY

BEYOND Products are tested to be reasonably free of defects, and when used and fabricated properly they will comply with the applicable manufacturing specifications within realistic deviations. we recommend customers to insect properly before installing. BEYOND warranty in on way covers defects and non-compliance from or otherwise attributable ti any other causes, including without limitation the following:

- Improper handling / transportation / storage of BEYOND
- Improper installation of BEYOND
- Improper or unintended usage of BEYOND
- Lack of or improper maintenance of BEYOND
- Exposure to high temperatures
- Unauthorized alteration to the products Outdoor applications
- There will be no guarantee or exchange under any circumstances
- Color variations in products from different batches are possible
- We recommend using products from same batch to avoid color variations
- This brochure is for presentation purposes only. Actual colors may differ.